


LIGHT WAND USER GUIDE

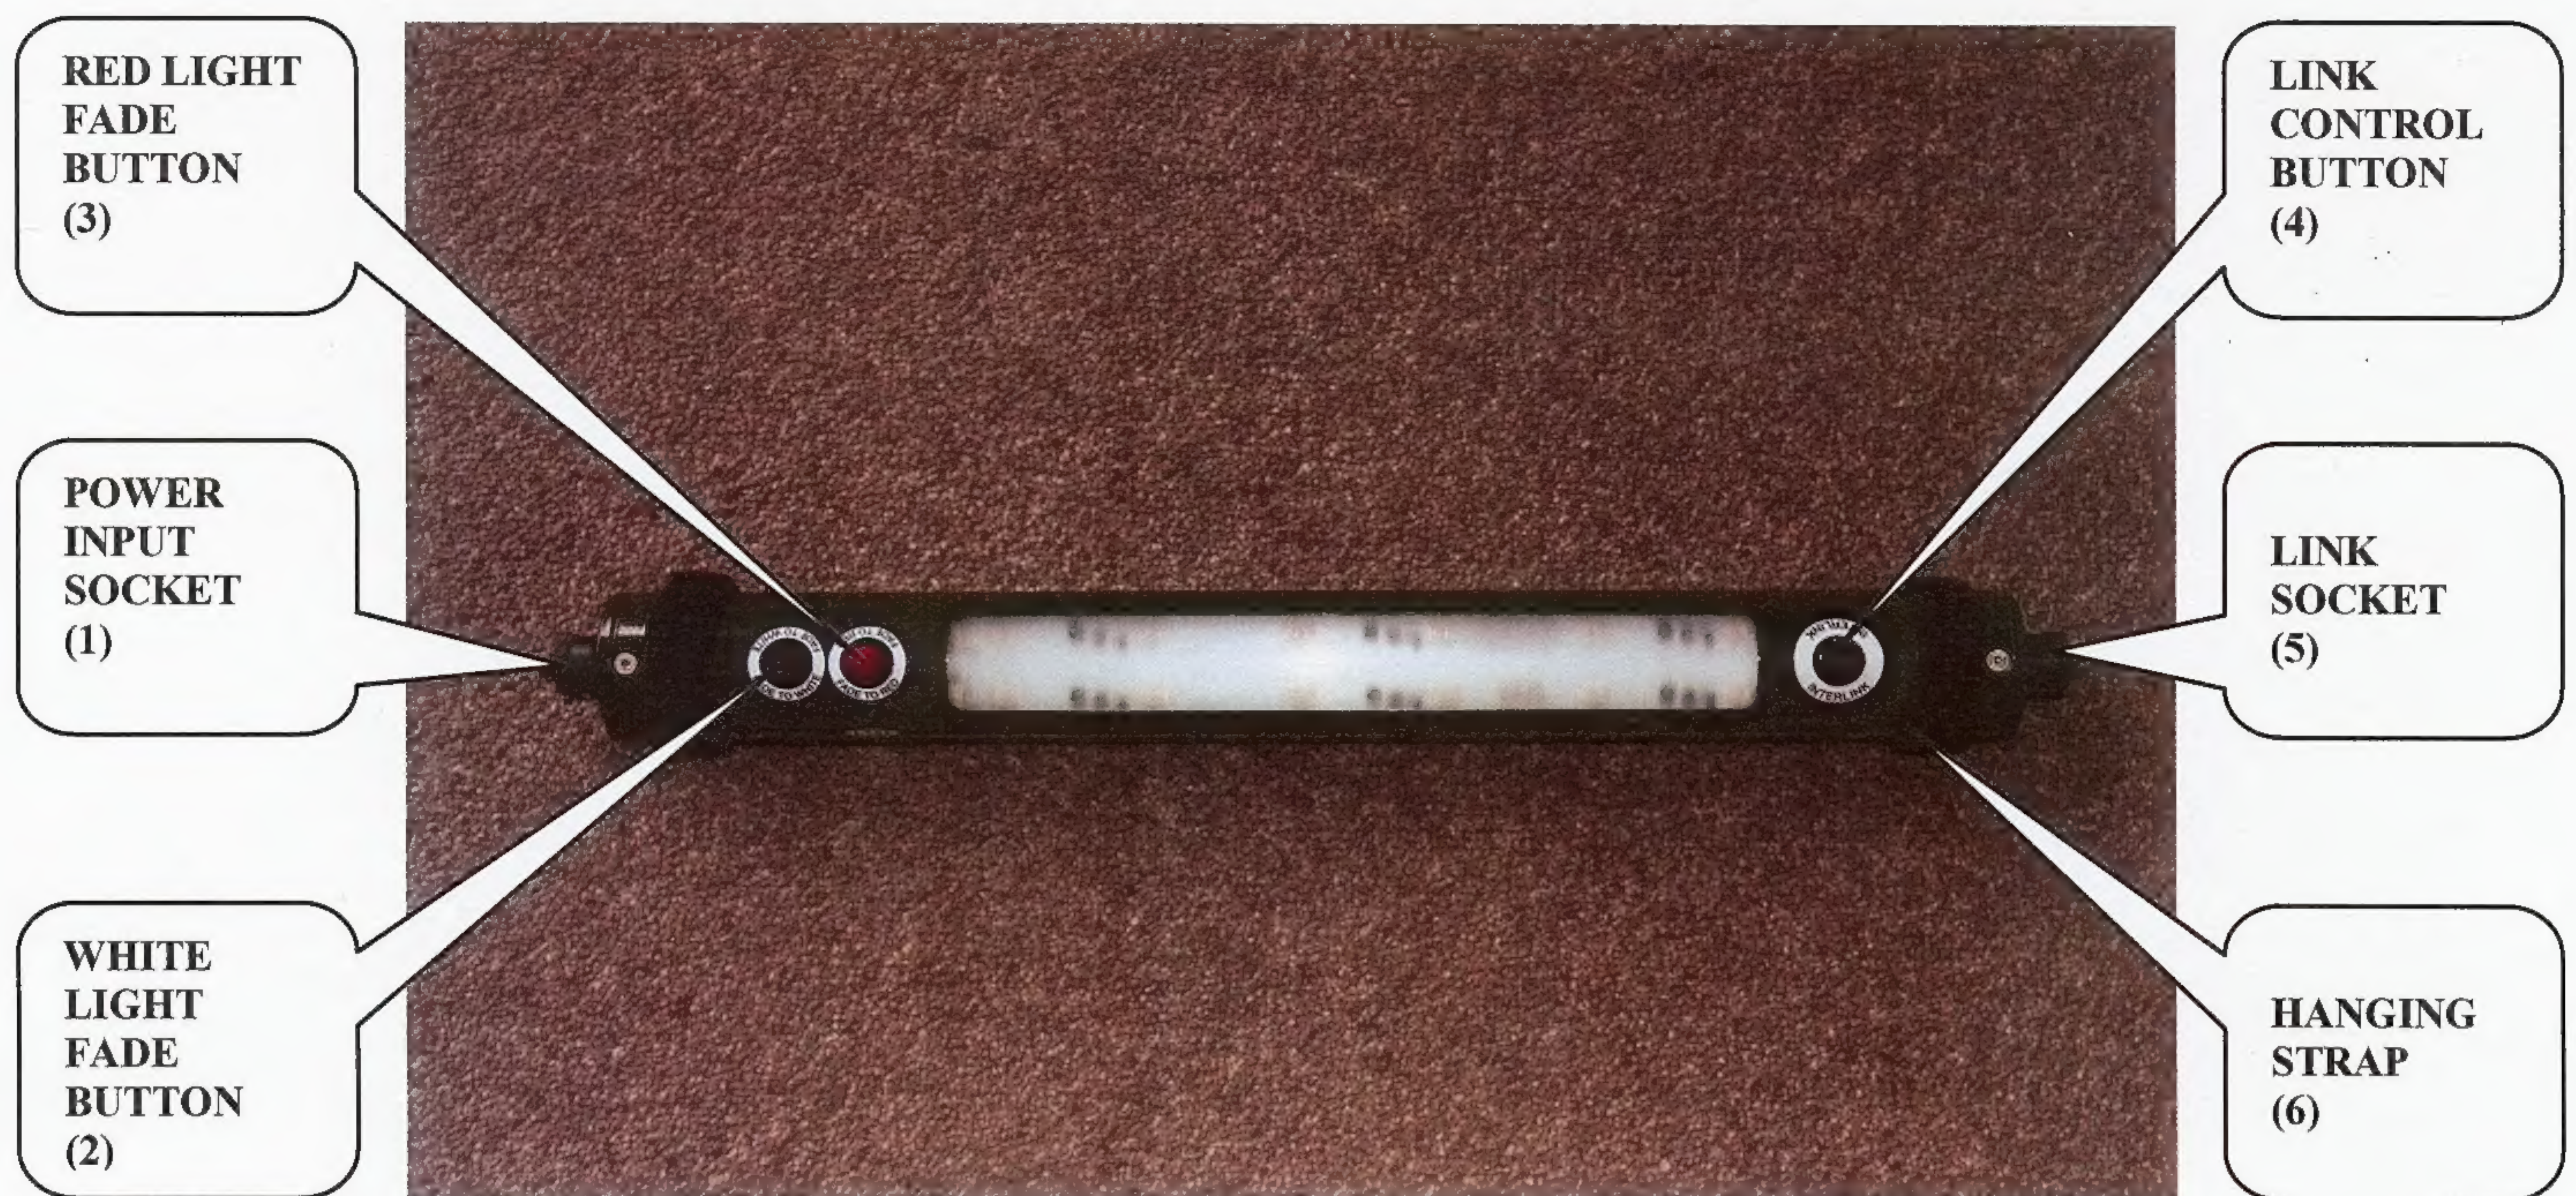

(1) **Power Input Socket.**

This socket is for the 24 volt DC power input lead (provided)

(2) **White Light Fade Button**

This button allows the operator to fade the red light to white and with continuous operation will increase the brightness of the white light.

(3) **Red Light Fade Button**

This button allows the operator to fade the white light to red and with continuous operation will increase the brightness of the red light.

(4) **Link Control Button**

This button allows the operator to operate up to five light wands if required by pressing the button once to engage the link. If pressed a second time it will disengage the link

(5) **Link Socket**

This socket is for the link cable between two light wands (optional).

(6) **Hanging Straps.**

These Velcro straps allow the operator to hang the light wand onto any support poles available.

Note.

When first powered up, the light wand will automatically come on in low level red light to ensure the operator is not compromised whilst in a hostile environment.

Holding both red and white fade buttons down for 6 seconds sets the light wand into flashing mode. (Alternating 1 second red/white flash). To cancel hold buttons down again for 6 seconds.